


Brief Description

The Peppers EC1-S*F and EC1-S*M type Conduit Stopper Box is for outdoor use in the appropriate Hazardous Areas with conductors carried in conduit, providing a flameproof barrier entry into enclosures and as a line bushing for terminating flying leads or for the direct inter-connection of associated enclosures. It gives environmental protection to IP66, IP68 (100 metres for 7 days), IP69 and Deluge.

Warning

Please read these instructions carefully. These products should not be used in applications except as detailed here or in our datasheets, unless confirmed in writing by Peppers. Peppers take no responsibility for any damage, injury or other consequential loss caused where products are not installed or used according to these instructions. This leaflet is not intended to advise on the selection of product. Further guidance can be found in the standards listed overleaf or the prevailing code of practice. The compound used within this cable gland has application limitations and may be adversely affected by some solvent vapours. If such vapours are likely to be present when the cable gland is in service, necessary precautions should be taken. Peppers Technical Datasheet can be downloaded from our website for further guidance. Prior to use the compound should be stored in its original packaging in a dry area at temperatures between 5°C and 21°C.

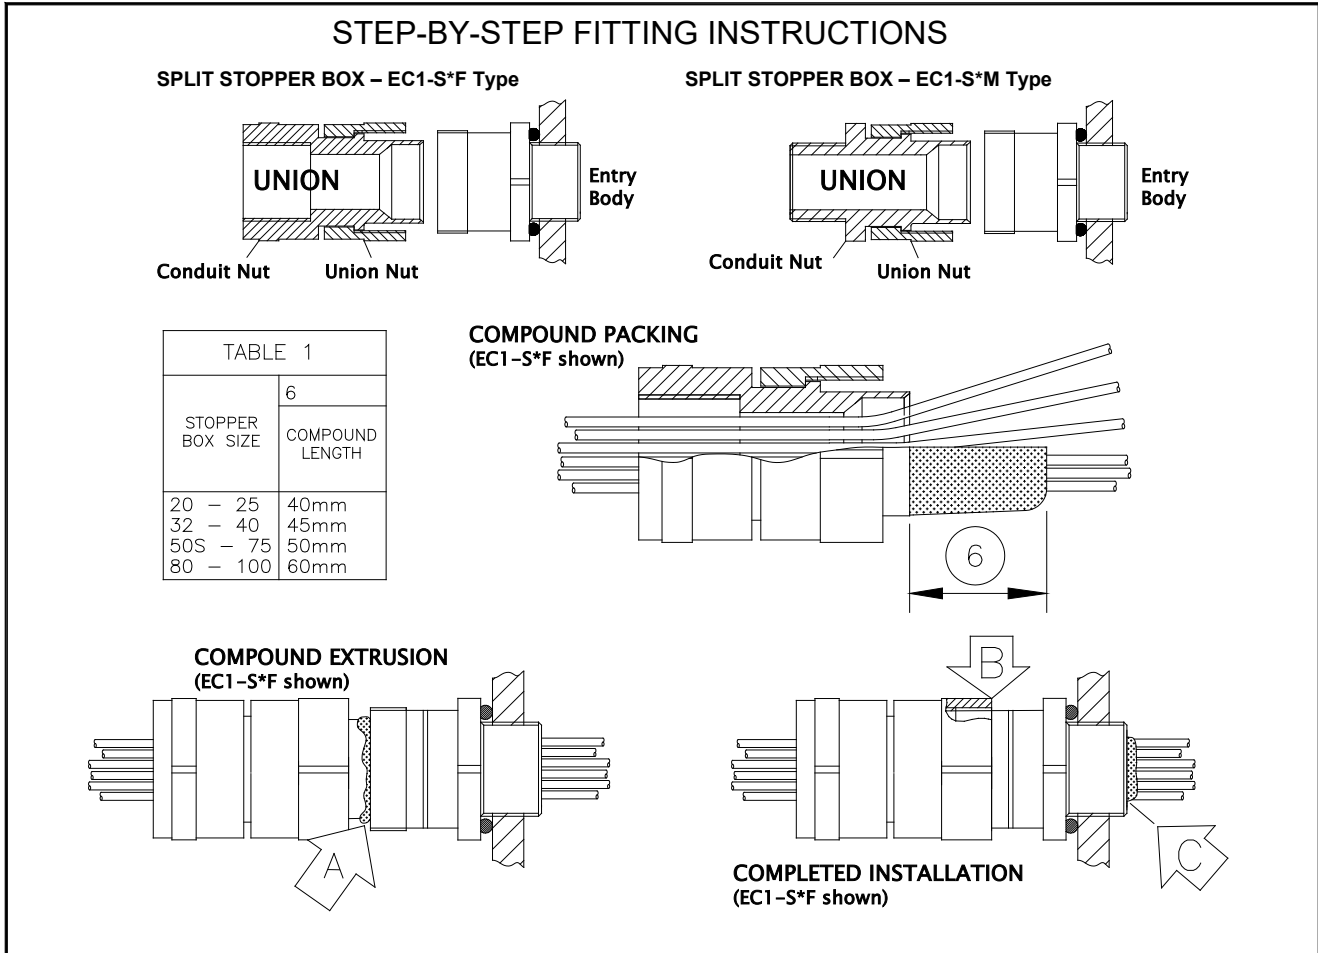

STEP-BY-STEP FITTING INSTRUCTIONS

- 1 Split Stopper Box as shown. Warning. The entry body of this cable gland is coated with a releasing agent to ensure the compound form can be inspected after curing. The entry body should not be treated with any lubricant or be exposed to any solvents. The internal bore of the entry body must not be damaged. Any handling during the course of normal installation will not affect the operation of the releasing agent.
- 2 Fit Entry Body, allowing for any installation accessories, and fully engage the thread into the equipment. For Entry Body installation torque for O-rings please refer to Table 2. Tapered threads shall be made up wrench tight. For further sealing and torque information please refer to our website.
- 3 For EC1-S*F glands apply suitable seal / sealant to conduit threads to maintain ingress protection. Screw Union onto conduit. For both EC1-S*F and EC1-S*M glands - prepare the conductors to suit the installation and pass through the union assembly.

HEALTH AND SAFETY WARNING The compound can cause eye and skin irritation. For your personal protection, wear the gloves supplied whilst in contact with the compound. **A COMPREHENSIVE SAFETY DATA SHEET IS AVAILABLE FOR DOWNLOAD FROM OUR WEBSITE.**

- 4 Check compound has not passed its "Use By" date. It has a work life of about 30 minutes at 16-27°C (60-80°F), during which time it can be worked and shaped before it begins to cure. Full cure takes 24 hours at 16-27°C (60-80°F). Lower temperatures will give a longer cure time. E.g. at 3°C (37°F) full cure takes about seven days. It is recommended to mix the putty and pack the fitting at 20°C (68°F). Minimum mixing/packing temperature is 10°C. Minimum curing temperature is 3°C.
- 5 Trim any hardened pieces from ends of stick. Mix the compound by rolling, folding and breaking. Ease mixing by cutting large sticks in half. Fully mixed compound has a uniform yellow colour with no streaks See Figure 1 for correctly mixed compound.
- 6 Support the conduit/union assembly. Starting at the middle, pack small amounts of rolled-out compound between the cores. Work outwards until all gaps are filled. Bundle the cores with cord or tape (see figure 2) so they are not disturbed. Wrap compound around the outside of the core bundle, then locate the compound & cores into the Union cup. Ensure that the cup is completely filled. Build up compound around the outside of the cores, with a slight taper and to approximate compound length shown in diagram and Table 1 column 6. Where cable has large quantity of cores ensure they are bundled near to the gland entry thread.
- 7 Pass cores through & push compound into Entry Body until Union cup engages. Remove squeezed out compound at arrow A. Screw Union Nut 7 full turns onto Entry Body (arrow B).
- 8 Clean off excess compound from Entry Body to allow withdrawal when cured (arrow C). Cores may be disturbed after 1 hour. Leave to cure for at least 4 hours when working at 21° C.
- 9 To release and pull back the joint for inspection, unscrew Union Nut. Using a wrench on the Conduit Nut, rotate back and forth whilst pulling the rear assembly away from the entry body. This will release the compound from the entry body. Do not over rotate as this may damage cable conductors. Pull the Conduit Nut and compound out for inspection. The compound should appear as in Figure 3 with no gaps, holes or cracks.
- 10 To re-make the joint on an EC1-S*F gland installation hold Conduit Nut and hand-tighten Union Nut. Then refer to table below and tighten using wrench to the given amount. To re-make the joint on an EC1-S*M gland installation screw the Union Nut into 2nd enclosure/equipment. Hand-tighten, then suitably secure with a wrench. Hold Conduit Nut and hand-tighten Union Nut. Then refer to Table 2 below and tighten using wrench to the given amount.
- 11 The equipment should not be energised until the compound has been left to cure for at least 4 hours when working at 21° C. See chart 'Energising Time vs. Temperature' for further guidance.

Figure 1



Figure 2




Figure 3





Table 2. Tightening information (Instruction 10), and permitted cores

Stopper Box Size	Entry Body Tightening Torque Point 2	Tighten Union Nut using wrench up to	Maximum Cable Size	Max Diameter Over Cores	Max No. of Cores
16S	5Nm	½-turn	10.0	8.9	12
20	5Nm	½-turn	14.0	12.5	40
25	5Nm	½-turn	18.5	16.5	60
32	5Nm	½-turn	26.3	23.5	80
40	5Nm	½-turn	32.2	28.8	130
50S	10Nm	½-turn	38.2	34.2	200
50	10Nm	½-turn	44.1	39.4	400
63S	10Nm	½-turn	50.1	44.8	400
63	10Nm	½-turn	56.0	50.0	425
75S	10Nm	½-turn	62.0	55.4	425
75	10Nm	½-turn	68.0	60.8	425
80	25Nm	¾-turn	72.0	64.4	425
85	25Nm	¾-turn	78.0	69.8	425
90	30Nm	¾-turn	84.0	75.1	425
100	40Nm	¾-turn	90.0	80.5	425

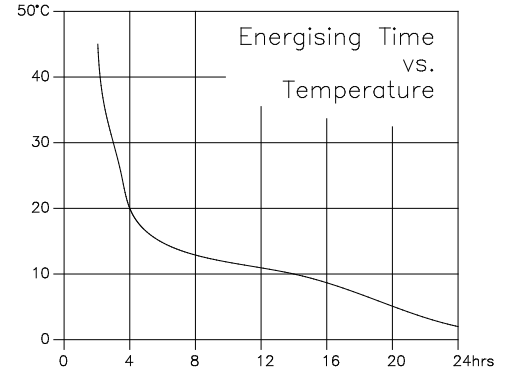

Approvals and Certification

Approval	Certificate Number	Protection Concept / Type
ATEX	CML 19ATEX1113X	Ex I M2 II 1D 2G Ex db I Mb / Ex db IIC Gb / Ex eb I Mb / Ex eb IIC Gb / Ex ta IIIC Da
	CML 19ATEX4114X	Ex II 3G Ex nR IIC Gc
IECEx	IECEx CML 19.0035X	Ex db I Mb / Ex db IIC Gb / Ex eb I Mb / Ex eb IIC Gb / Ex ta IIIC Da / Ex nR IIC Gc

Installation Guidance

Point	Advice
1	EN/IEC 60079-10 EN/IEC 60079-14
2	Installation should only be carried out by a competent electrician, skilled in cable gland installation.
3	Comprehensive details of the compliance standards can be found on the product certificates which are available for download from our website
4	NO INSTALLATION SHOULD BE CARRIED OUT UNDER LIVE CONDITIONS.
5	Threaded entries: the product can be installed directly into threaded entries. Threaded entries should comply with the relevant applicable standards and have a lead-in chamfer to allow for full engagement of the threads. Failure to provide a sufficient lead-in chamfer may lead to ingress sealing issues. For 'flameproof' and 'dust' applications, where no sealing method is used, a minimum of 5 fully engaged parallel threads is required. Metric threads are supplied with an o-ring and will maintain IP66, IP68 & IP69. Other parallel entry threads will maintain an IP rating of IP64. A sealing washer should be used to maintain all IP ratings greater than IP64. Any thread sealant used should be non-hardening and comply with the prevailing code of practice.
6	To maintain the Ingress Protection rating of the product, the entry hole must be perpendicular to the surface of the enclosure. The surface should be sufficiently flat and rigid to make the IP joint. The surface must be clean and dry. The product incorporates a thread run out according to general machining techniques and will not have a full form thread for the entire length and as such entry threads should have a suitable lead-in chamfer to ensure a seal is maintained. Further guidance can be found on our website. It is the users/installers responsibility to ensure that the interface between the enclosure and breather drain is suitably sealed for the required application.
7	Whilst Peppers products with tapered threads, when installed into a threaded entry, have been tested to maintain IP66 without any additional sealant, due to the differing gauging tolerances associated with the use of tapered threads it is recommended to use a non-hardening thread sealant if an IP rating higher than IP64 is required. Any sealant used should comply with the prevailing code of practice.
8	Once installed do not dismantle except for routine inspection. An inspection should be conducted as per IEC/EN 60079-17. After inspection the gland should be re-assembled as instructed, ensuring the mid cap and back nut are correctly tightened to ensure the cable is secure.
9	The o-ring that is fitted to the outer diameter of the Ferrule (visible on figure 2) is to prevent compound from travelling inside the gland during the assembly process. It has no other function and does not contribute to the protection concept or ingress protection rating of the cable gland.
10	If required an anti-seize lubricant may be used to aid assembly and routine inspection. The lubricant should comply with the prevailing code of practice and care should be taken to ensure no lubricant comes into contact with the cable gland seals as this may impair performance.
11	For chemical resistance information please refer to Peppers T1000 Compound data sheet. Available on request.

Interpretation of Markings. Markings on the outside of this gland carry the following meanings:

Cable Gland Type & Size EC1-S-a-b-ccc-ddd-eee-nn; where: -

a =	Main component material B = brass S = stainless steel	ddd =	Entry thread type and size
b =	Back End Configuration F = female M = male	eee =	Back End Connection Thread type and size
ccc =	Gland size	nn =	Year of manufacture

Special Conditions for Safe Use

- The cable glands/stopper boxes shall not be used in enclosures where the temperature, at the point of entry/mounting, is outside of the range of -60°C to +135°C for Peppers T1000 Compound.
- The interface seals comply with the requirements of the standards listed in this report when the cable glands are fitted to a representative enclosure having a smooth flat mounting surface. In practice the interface between the male thread of the glands and their associated enclosure cannot be defined, therefore it is the users' responsibility to ensure that the appropriate ingress protection level is maintained at these interfaces.
- The parallel threaded entry component threads will be suitably sealed using a method that is applicable to the associated equipment to which the gland will be attached. This will be in accordance with the relevant installation code of practice and will ensure that any ingress protection and restricted breathing sealing requirements are maintained.
- The threaded entry component threads without interface O-ring seals installed in an explosive dust atmosphere, within threaded entries, shall only be fitted into enclosures that have either:
 - parallel entries that will ensure that a minimum of 5 full threads of contact will be maintained, this is in accordance with clause 5.1.2 of EN 60079-31:2014
 - tapered entries that will ensure that a minimum of 3 ½ full threads of contact will be maintained, this is in accordance with clause 5.1.2 of EN 60079-31:2014
- Cable glands with sizes 16S, 20S and 20 shall not be used for Group I, EPL Mb applications where there is a 'high' risk of mechanical damage.