




PRODUCT TYPE LT-C

Double Compression Barrier Gland featuring a Liquid Tight Connector for Flexible Metallic Conduit and the Peppers T-1000 Compound

Ex db : Ex eb : Ex ta : IP66 : IP68

PART NUMBERS:

L	T	C	B
			S

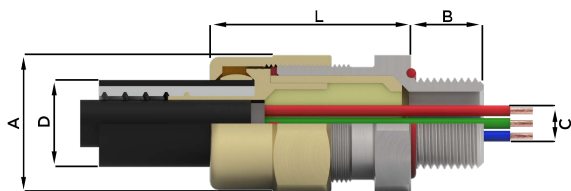

REFERENCE NUMBER: 4.4.0

EXAMPLE PART NUMBERING:
LT-CB/NP/20-1/M20

LT-C	Gland featuring Peppers T-1000 Compound and connection for liquid tight flexible metallic conduit
B	Brass (B) / Stainless Steel (S)
L	Locknut (material dictated by gland entry thread material)
N	Including IP Washer, Nylon (N) - Fibre (V) - PTFE (H)
T	Including Earth Tag
S	Including Serrated Washer
1	Quantity per kit
NP	Nickel Plated
20-1	Gland and Conduit Connection Size
M20	M20 x 1.5 Male Entry Thread

OPTIONAL ACCESSORIES:

LOCKNUT	Brass (ACBLN) / Stainless Steel (ACSLN)
EARTH TAG	Brass (ACBET) / Stainless Steel (ACSET)
IP WASHERS	Nylon (ACNSW) / Fibre (ACFSW) / PTFE (ACPSW)
SERRATED WASHERS	Stainless Steel (ACSSW)

IP RATING:	IP66 & IP68 (100 metres - 7 Days) & DTS01:1991
OPERATING TEMP:	-60°C to +135°C
MATERIALS:	Brass or Stainless Steel
PLATING:	Electroless Nickel
COMPOUND:	Peppers T-1000 Sealing Compound

CURING TIME:

@ 21°C Conductor termination can be effected after 1 hour.
The equipment can be energised after 4 hours.

CABLE GLAND SELECTION TABLE
(ALL DIMENSIONS IN mm)

Gland & Connection Size	Standard Entry Thread Size		Metric Thread Length [B]	Cable Acceptance Details			Conduit Data [D]		Nominal Protusion Length [L]	Dimensions/Weight (Metric)		
	Metric	NPT		Max No. of Cores [C]	Max Ø Over Cores [C]	Max Cable Inner Sheath Ø	Typical Conduit I/D	Max Conduit O/D		Across Flats [A]	Across Corners	Weight Kgs
20S-1	M20 x 1.5	1/2" or 3/4"	16	9	5.0	5.0	6.2 - 7.1	11.4 - 12.9	45.0	25.4	28.0	0.180
20S-2	M20 x 1.5	1/2" or 3/4"	16	20	7.8	7.8	9.8 - 10.3	14.2 - 15.6	44.0	25.4	28.0	0.177
20-1	M20 x 1.5	1/2" or 3/4"	16	35	10.4	10.4	12.1 - 13.0	17.0 - 19.1	44.0	30.0	33.0	0.217
20-2	M20 x 1.5	1/2" or 3/4"	16	40	12.5	13.3	15.8 - 16.3	20.8 - 22.3	42.0	30.0	33.0	0.218
25-1	M25 x 1.5	3/4" or 1"	16	60	17.8	18.0	20.8 - 21.3	26.0 - 27.8	46.0	41.3	45.4	0.364
32-1	M32 x 1.5	1" or 1 1/4"	16	80	23.5	23.6	26.0 - 27.1	32.7 - 34.5	54.0	46.0	50.6	0.482
40-1	M40 x 1.5	1 1/4" or 1 1/2"	16	130	28.8	31.8	34.8 - 35.8	41.1 - 43.3	57.0	55.0	60.5	0.706
50-1	M50 x 1.5	2"	16	200	37.0	37.0	40.0 - 40.6	47.3 - 49.4	66.0	65.0	71.5	0.989
63-1	M63 x 1.5	2 1/2"	19	300	48.0	48.0	50.5 - 51.9	59.4 - 61.4	67.0	80.0	88.0	1.410
75-1	M75 x 1.5	3"	19	325	59.3	59.3	62.9 - 63.9	72.1 - 74.1	67.0	98.8	108.7	1.945
75-2	M75 x 1.5	3"	19	425	60.8	68.0	77.9 - 78.7	87.8 - 90.0	67.0	104.7	115.2	2.338

NOTES

- Gland size does not necessarily equate to the entry thread size.
- All brass entry threads are Nickel Plated as standard.
- Dimensions (A) & (B) may differ for glands with non metric entry threads. Please refer to our "Thread Reference Tables" for specific dimensions.
- Assembly instructions must be read prior to installation and adhered to in full.
- Peppers supplies cable glands with parallel entry threads that conform to the flameproof threaded joint requirements of IEC/EN 60079-1 and other equivalent standards. They usually incorporate a thread run out according to the available machining techniques and will not have a full form thread for the entire length.

- Peppers Cable Glands Limited will not be held responsible for clients' installations where this has not been taken into account.
- It is the installer's responsibility to ensure that the conduit is secured correctly.
- The gland is supplied with the correct amount of the two-part compound, gloves and instructions to allow one complete termination.
- If fit testing is required for specific conduit please contact Peppers.
- When selecting IP Washer material for use with glands, please be aware of the accessories temperature range to ensure they are suitable for the intended installation.
- Where approval in addition to ATEX and IECEx is required, this must be clearly requested at time of enquiry / order.