




PRODUCT TYPE CR-O

Single Compression Gland for armoured cable featuring "CROCKLOCK"

Ex eb : Ex ta : IP66 Class I Div 2 : AEx e : AEx ta

PART NUMBERS:

C	R	O	1	B	*
			3	S	R

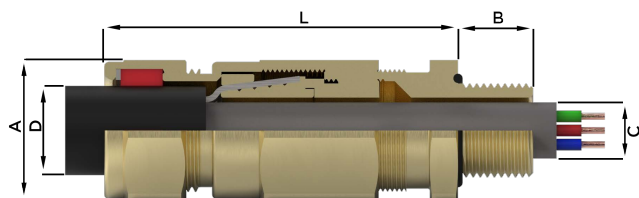

EXAMPLE PART NUMBERING:

CR-O1BCK1/NP/20/M20

CR	Gland featuring "CROCKLOCK", single orientation clamping
O	Outer Sheath Seal Only
1	Neoprene Seal (1) - Silicone Seal (3)
B	Brass (B) - Stainless Steel (S)
R	Reduced Bore Seal
C	PVC Shroud (C) - PCP Shroud (P) - LSOH Silicone Shroud (3)
K-V-H	Locknut, Earth Tag & Nylon (K) or Fibre (V) IP Washer
S	Including Serrated Washer
1	Quantity per kit
NP	Nickel Plated (NP)
20	Gland shell size
M20	M20 x 1.5 Male Entry Thread

OPTIONAL ACCESSORIES:

LOCKNUT	Brass (ACBLN) / Stainless Steel (ACSLN)
EARTH TAG	Brass (ACBET) / Stainless Steel (ACSET)
IP WASHERS	Nylon (ACNSW) / Fibre (ACFSW) / PTFE (ACPSW)
SERRATED WASHERS	Stainless Steel (ACSSW)
SHROUDS	PVC (ACSPVC) / PCP (ACSPCP) / LSOH Silicone (ACSSIO)

IP RATING:	IP66 Type 4X & DTS01:1991
OPERATING TEMP:	Neoprene Seals -35°C to +90°C / Silicone Seals -60°C to +180°C
MATERIALS:	Brass or Stainless Steel
PLATING:	Electroless Nickel

PRODUCT DESCRIPTION

"CR-O" type glands are certified Increased Safety Ex eb and Dust Protected Ex ta. They are suitable for use in Zone 1 and 2 for Gas Groups IIA, IIB and IIC and additionally for use in Zones 20, 21 and 22 for Dusts Groups IIIA, IIIB and IIIC. Also certified for Zone and Division installations for use with Marine Shipboard and Tray Cables under the NEC and CEC. They provide a controlled environmental seal on the outer sheath and "CROCKLOCK", a unique non reversible multi clamping system for wire, braid and tape armoured cables. The gland maintains IP66 and is deluge proof without the use of an additional seal. It is supplied with an IP O-ring seal as standard on metric entry threads. Options are available for use with LSOH cables and extreme temperature applications.

COMPLIANCE STANDARDS:

EN 60079-0, EN 60079-7, EN 60079-31
IEC 60079-0, IEC 60079-7, IEC 60079-31 & IEC 60529
C22.2 (see certificate), CAN/CSA 60679-0/7
UL514B, UL1203, UL2225, UL50E, ANSI/UL 60079-0/7, ISA 60079-31

CERTIFICATION:

ATEX	II 1D 2G Ex eb IIC Gb / Ex ta IIIC Da Ex eb IIC Gb / Ex ta IIIC Da
IECEX	Class I Division 2, Groups A, B, C & D Class II Division 1, Groups E, F & G Class III, Enclosure Type 4X Class I Zone 1 Ex e II
CEC - Canada	Class II Division 1, Groups E, F & G Class III, Enclosure Type 4X Class I Zone 1 AEx e IIC Gb Class II Zone 20 AEx ta IIIC Da
NEC - USA	1Ex e IIC Gb X / Ex ta IIIC Da X Ex eb IIC Gb / Ex ta IIIC Da
EAC	Ex e IIC
INMETRO - Brazil	II 2G Ex eb IIC Gb / II 1D Ex ta IIIC Da
SAC - China	Ex e IIC Gb (Zone 2)
UKRAINE	Ex e IIC
CCoE - India	Specified ABS Rules
KCS - Korea	Ex e IIC Gb / Ex ta IIIC Da
ABS	Ex e IC / Ex e IIC / Ex ta IIIC
LLOYD'S	
RMRS	

CERTIFICATION No:

ATEX	BAS 01ATEX2271X
IECEX	IECEX SIR 07.0099X
CEC - Canada	CSA 1356011
NEC - USA	CSA 2627370
EAC	TC RU C-GB.BH02.B.00693-18
INMETRO - Brazil	NCC 13.2185 X
SAC - China	NEPSI GYJ16.1402X
UKRAINE	CLJ 18.0326 X
CCoE - India	PESO P365300/14
KCS - Korea	15-GA4BO-0671X
ABS	14-LD463991-1-PDA
LLOYD'S	10/00056(E1)
RMRS	14.02755.315

CABLE GLAND SELECTION TABLE (ALL DIMENSIONS IN mm)

Gland Size	Entry Thread Size		Metric Thread Length [B]	Cable Acceptance Details					Armour Acceptance Range	Nominal Protrusion Length [L]	Dimensions/Weight (Metric)			Shroud Size	
	Metric	NPT		Inner Sheath [C]		Outer Sheath [D]		Reduced [D]			Across Flats [A]	Across Corners	Weight Kgs		
				Max	Min	Max	Min	Max							
16	M20 x 1.5	1/2" or 3/4"	16	11.7	8.4	13.5	6.7	10.3	0.15-1.25	78	25.4	28.0	0.177	EL24	
20S	M20 x 1.5	1/2" or 3/4"	16	11.7	11.5	16.0	9.4	12.5	0.15-1.25	78	25.4	28.0	0.173	EL24	
20	M20 x 1.5	1/2" or 3/4"	16	14.0	15.5	21.1	12.0	17.6	0.15-1.25	78	30.0	33.0	0.232	EL30	
25	M25 x 1.5	3/4" or 1"	16	20.0	20.3	27.4	16.8	23.9	0.15-1.60	90	38.0	41.4	0.415	EL38	
32	M32 x 1.5	1" or 1 1/4"	16	26.3	26.7	34.0	23.2	30.5	0.15-2.00	105	46.0	50.6	0.771	EL46	
40	M40 x 1.5	1 1/4" or 1 1/2"	16	32.2	33.0	40.6	28.6	36.2	0.20-2.00	113	55.0	60.5	1.091	EL55	
50S	M50 x 1.5	1 1/2" or 2"	16	38.2	39.4	46.7	34.8	42.4	0.20-2.50	125	65.0	71.5	1.251	EL65	
50H	M50 x 1.5	1 1/2" or 2"	16	38.2	45.7	53.2	41.1	48.5	0.30-2.50	125	65.0	71.5	1.397	EL65	
50	M50 x 1.5	2"	16	44.1	45.7	53.2	41.1	48.5	0.30-2.50	125	65.0	71.5	1.397	EL65	
63S	M63 x 1.5	2" or 2 1/2"	19	50.1	52.1	59.5	47.5	54.8	0.30-2.50	125	80.0	88.0	2.545	EL80	
63H	M63 x 1.5	2" or 2 1/2"	19	50.1	58.4	65.8	53.8	61.2	0.30-2.50	125	80.0	88.0	2.545	EL80	
63	M63 x 1.5	2 1/2"	19	56.0	58.4	65.8	53.8	61.2	0.30-2.50	125	80.0	88.0	2.100	EL80	
75S	M75 x 1.5	2 1/2" or 3"	19	62.0	64.8	72.2	60.2	68.0	0.30-2.50	131	90.0	99.0	2.909	EL90	
75H	M75 x 1.5	2 1/2" or 3"	19	62.0	71.1	78.0	66.5	73.4	0.30-2.50	131	90.0	99.0	2.909	EL90	
75	M75 x 1.5	3"	19	68.0	71.1	78.0	66.5	73.4	0.30-2.50	131	90.0	99.0	2.310	EL90	
80	M80 x 2.0	3" or 3 1/2"	25	72.0	77.0	84.0	71.9	79.4	0.45-3.15	170	104.0	115.2	4.944	EL104	
85	M85 x 2.0	3" or 3 1/2"	25	78.0	79.6	90.0	75.0	85.4	0.45-3.15	170	104.0	115.2	4.064	EL104	
90	M90 x 2.0	3 1/2" or 4"	25	84.0	88.0	96.0	82.0	91.4	0.45-3.15	170	114.0	125.7	5.121	EL114	
100	M100 x 2.0	3 1/2" or 4"	25	90.0	92.0	102.0	87.4	97.4	0.45-3.15	170	114.0	125.7	4.356	EL114	

NOTES

- Gland size does not necessarily equate to the entry thread size.
- The IP O-ring seal is only available on metric entry threads. IP washers can be supplied for tapered entry threads.
- Dimensions (A) & (B) may differ for glands with non metric entry threads. Please refer to our "Thread Reference Tables" for specific dimensions.
- Assembly instructions must be read prior to installation and adhered to in full.
- Peppers supply cable glands with parallel entry threads that conform to the flameproof threaded joint requirements of IEC/EN 60079-1 and other equivalent standards. They usually incorporate a thread run out according to the available machining techniques and will not have a full form thread for the entire length.

- Peppers Cable Glands Limited will not be held responsible for clients' installations where this has not been taken into account.
- When selecting IP Washer & Shroud material for use with glands, please be aware of the accessories temperature range to ensure they are suitable for the intended installation.
- Where approval in addition to ATEX, IECEX and CSA is required, this must be clearly requested at time of enquiry / order.