




PRODUCT TYPE D*U

Single Compression Gland for Armoured Cable featuring Peppers Multi-armour clamping system

Ex db : Ex eb : Ex nR : Ex ta : IP66 : IP68

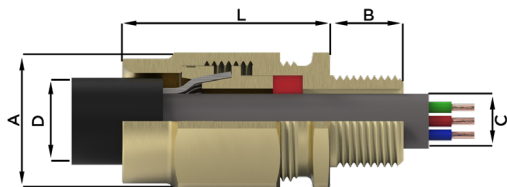

EXAMPLE PART NUMBERING:
DIUBF/NP20/OSONPT

| | |
|---------------|---|
| D | Gland featuring Peppers Multi-armour clamping system |
| 1 | Neoprene Seal (1) - Silicone Seal (3) - Neoprene/Lead (2) - Silicone/Lead (4) |
| U | SWA / SWB or STA |
| B | Brass (B) / Stainless Steel (S) |
| IE | Integral Earth (see page 43) |
| F | Multiple Certification |
| C | PVC Shroud (C) - PCP Shroud (P) - LSOH Silicone Shroud (3) |
| K-V-H | Locknut, Earth Tag & Nylon (K), Fibre (V) or PTFE (H) IP Washer |
| S | Including Serrated Washer |
| 1 | Quantity per kit |
| NP | Nickel Plated |
| 20 | Gland shell size |
| OSONPT | 1/2"NPT Male Entry Thread |

OPTIONAL ACCESSORIES:

| | |
|-------------------------|--|
| LOCKNUT | Brass (ACBLN) / Stainless Steel (ACSLN) |
| EARTH TAG | Brass (ACBET) / Stainless Steel (ACSET) |
| IP WASHERS | Nylon (ACNSW) / Fibre (ACFSW) / PTFE (ACPSW) |
| SERRATED WASHERS | Stainless Steel (ACSSW) |
| SHROUDS | PVC (ACSPVC) / PCP (ACSPCP) / LSOH Silicone (ACSSIO) |

| | |
|------------------------|---|
| IP RATING: | IP66 & IP68 (50 metres - 7 days) |
| OPERATING TEMP: | Neoprene Seals -35°C to +90°C Silicone Seals -60°C to +180°C |
| MATERIALS: | Brass or Stainless Steel |
| PLATING: | Electroless Nickel |

CABLE GLAND SELECTION TABLE
(ALL DIMENSIONS IN mm)

| Gland size | Entry Thread Size | | Metric Thread Length [B] | Cable Acceptance Details | | | Armour Acceptance Range | | Nominal Protusion Length [L] | Dimensions/Weight (Metric) | | | Shroud Size |
|------------|-------------------|------------------|--------------------------|--------------------------|------------------|-------|-------------------------|---------------|------------------------------|----------------------------|----------------|------------|-------------|
| | Metric | NPT | | Inner Sheath [C] | Outer Sheath [D] | Max | Orientation 1 | Orientation 2 | | Across Flats [A] | Across Corners | Weight Kgs | |
| 16 | M16 x 1.5 | 3/8" or 1/2" | 16 | 3.5 | 8.4 | 13.5 | 0.80-1.25 | 0.20-0.80 | 57 | 24.0 | 26.5 | 0.143 | L24 |
| 16 | M20 x 1.5 | 1/2" or 3/4" | 16 | 3.5 | 8.4 | 13.5 | 0.80-1.25 | 0.20-0.80 | 59 | 24.0 | 26.5 | 0.154 | L24 |
| 20S | M20 x 1.5 | 1/2" or 3/4" | 16 | 8.0 | 11.7 | 16.0 | 0.80-1.25 | 0.20-0.80 | 56 | 24.0 | 26.5 | 0.125 | L24 |
| 20 | M20 x 1.5 | 1/2" or 3/4" | 16 | 6.7* | 14.0 | 21.1 | 0.80-1.25 | 0.20-0.80 | 56 | 30.0 | 33.0 | 0.180 | L30 |
| 25 | M25 x 1.5 | 3/4" or 1" | 16 | 13.0 | 20.0 | 27.4 | 1.25-1.60 | 0.20-0.80 | 56 | 37.6 | 41.4 | 0.256 | L38 |
| 32 | M32 x 1.5 | 1" or 1 1/4" | 16 | 19.0 | 26.3 | 34.0 | 1.60-2.00 | 0.30-1.20 | 65 | 46.0 | 50.6 | 0.400 | L46 |
| 40 | M40 x 1.5 | 1 1/4" or 1 1/2" | 16 | 25.0 | 32.2 | 40.6 | 1.60-2.00 | 0.30-1.20 | 72 | 55.0 | 60.5 | 0.649 | L55 |
| 50S | M50 x 1.5 | 1 1/2" or 2" | 16 | 31.5 | 38.2 | 46.7 | 2.00-2.50 | 0.30-1.60 | 73 | 65.0 | 71.5 | 0.940 | L65 |
| 50H | M50 x 1.5 | 1 1/2" or 2" | 16 | 31.5 | 38.2 | 53.2 | 2.00-2.50 | 0.30-1.60 | 73 | 65.0 | 71.5 | 0.849 | L65 |
| 50 | M50 x 1.5 | 2" | 16 | 36.5 | 44.1 | 53.2 | 2.00-2.50 | 0.30-1.60 | 73 | 65.0 | 71.5 | 0.707 | L65 |
| 63S | M63 x 1.5 | 2" or 2 1/2" | 19 | 42.5 | 50.1 | 59.5 | 2.00-2.50 | 0.30-1.60 | 76 | 80.0 | 88.0 | 1.369 | L80 |
| 63H | M63 x 1.5 | 2" or 2 1/2" | 19 | 42.5 | 50.1 | 65.8 | 2.00-2.50 | 0.30-1.60 | 76 | 80.0 | 88.0 | 1.306 | L80 |
| 63 | M63 x 1.5 | 2 1/2" | 19 | 49.5 | 56.0 | 65.8 | 2.00-2.50 | 0.30-1.60 | 76 | 80.0 | 88.0 | 1.123 | L80 |
| 75S | M75 x 1.5 | 2 1/2" or 3" | 19 | 54.5 | 62.0 | 72.2 | 2.00-2.50 | 0.50-1.60 | 82 | 90.0 | 99.0 | 1.661 | L90 |
| 75H | M75 x 1.5 | 2 1/2" or 3" | 19 | 54.5 | 62.0 | 78.0 | 2.00-2.50 | 0.50-1.60 | 82 | 90.0 | 99.0 | 1.553 | L90 |
| 75 | M75 x 1.5 | 3" | 19 | 60.5 | 68.0 | 78.0 | 2.00-2.50 | 0.50-1.60 | 82 | 90.0 | 99.0 | 1.310 | L90 |
| 80 | M80 x 2.0 | 3" or 3 1/2" | 25 | 62.2 | 72.0 | 84.0 | 3.15-4.00 | 0.50-1.60 | 110 | 104.0 | 115.2 | 2.718 | L104 |
| 80H | M80 x 2.0 | 3" or 3 1/2" | 25 | 62.2 | 72.0 | 90.0 | 3.15-4.00 | 0.50-1.60 | 110 | 104.0 | 115.2 | 2.489 | L104 |
| 85 | M85 x 2.0 | 3" or 3 1/2" | 25 | 69.0 | 78.0 | 90.0 | 3.15-4.00 | 0.50-1.60 | 110 | 104.0 | 115.2 | 2.326 | L104 |
| 90 | M90 x 2.0 | 3 1/2" or 4" | 25 | 74.0 | 84.0 | 96.0 | 3.15-4.00 | 0.50-1.60 | 110 | 114.0 | 125.7 | 2.852 | L114 |
| 90H | M90 x 2.0 | 3 1/2" or 4" | 25 | 74.0 | 84.0 | 102.0 | 3.15-4.00 | 0.50-1.60 | 110 | 114.0 | 125.7 | 2.629 | L114 |
| 100 | M100 x 2.0 | 3 1/2" or 4" | 25 | 82.0 | 90.0 | 102.0 | 3.15-4.00 | 0.50-1.60 | 110 | 114.0 | 125.7 | 2.496 | L114 |

NOTES

- * For gland size 20 the silicone inner seal has a minimum diameter of 9.3 mm and NOT 6.7mm
- Gland size does not necessarily equate to the entry thread size.
- Dimensions (A) & (B) may differ for glands with non metric entry threads.
- Please refer to our "Thread Reference Tables" for specific dimensions.
- Assembly instructions must be read prior to installation and adhered to in full.
- Peppers supplies cable glands with parallel entry threads that conform to the flameproof threaded joint requirements of IEC/EN 60079-1 and other equivalent standards. They usually incorporate a thread run out according to the general machining techniques and parts will not have a full form thread for the entire

- length. Peppers Cable Glands Limited will not be held responsible for clients' installations where this has not been taken into account.
- When selecting IP Washer & Shroud material for use with glands, please be aware of the accessories temperature range to ensure they are suitable for the intended installation.
- Orientation 2 Min ranges stated are for double layer braid and single layer tape.

PART NUMBERS:

| | | | | | |
|---|---|---|---|----|---|
| D | 1 | U | B | * | F |
| | 2 | | S | IE | |
| | 3 | | | | |
| | 4 | | | | |

New Product



PRODUCT DESCRIPTION

"D*U" type single compression glands are certified Flameproof Ex db, Increased Safety Ex eb, Restricted Breathing Ex nR and Dust Protected Ex ta. They are suitable for use in Zone 1 and 2 for Gas Groups IIA, IIB and IIC and additionally for use in Zones 20, 21 and 22 for Dust Groups IIIA, IIIB and IIIC. They provide a controlled Ex db & IP seal on the cable inner sheath and Peppers multi-armour clamping system for wire, braid and tape armoured cables. The gland has been tested to IP66 and IP68 to 50 metres. The "IE" version allows the gland to be used with HV cables where the fault load is greater than 10.4kA and options are available for use with lead sheath, LSOH cables and extreme temperature applications.

COMPLIANCE STANDARDS:

EN 60079-0, EN 60079-1, EN 60079-7, EN 60079-15, EN 60079-31
IEC 60079-0, IEC 60079-1, IEC 60079-7, IEC 60079-15, IEC 60079-31 & IEC 60529

CERTIFICATION:

| | |
|-------|---|
| ATEX | II 1D 2G Ex db IIC Gb / Ex eb IIC Gb / Ex ta IIC Da II 3G Ex nR IIC Gc |
| IECEX | Ex db IIC Gb / Ex eb IIC Gb / Ex nR IIC Gc / Ex ta IIIC Da |

CERTIFICATION NO:

| | |
|-------|-----------------------------------|
| ATEX | CML 19ATEX1106X & CML 19ATEX4109X |
| IECEX | IECEX CML 19.0031X |

